

Features

- Double encapsulation (thin-film and PS28 housing)
- Sapphire Window
- Very high sensitivity


Array module specification

Type No.	Package	Number of pixels	Pixel pitch [μm]	Pixel width [μm]	Pixel height [μm]	Operating temperature [°C]
PbS_Mod_256_0050_0040x0380	PS28	256	50	40	x 380	-30 to 70
<ul style="list-style-type: none"> • Pixel operability > 95% • Array length: 12.8 mm (active area) • Chip (Glass wafer) size: 15 x 2.5 mm 						


Electrical and optical characteristics per pixel

Element temperature [°C]	Peak wave-length λ_p [μm]	20% cut-off wavelength λ_c [μm]	Peak D* (620 Hz, 1 Hz) [cm·Hz ^{1/2} /W]		Time constant [μs]	Dark resistance R _D [MΩ]
	Typ.	Typ.	Typ.	Min.	Typ.	
22	2.7	2.9	1 · 10 ¹¹	0.5 · 10 ¹¹	200	3 - 30
<ul style="list-style-type: none"> • Measured with 1550 nm LED, incident power 16 μW/cm² • Measured in a voltage divider circuit with 50 V/mm • Photo responsivity and detectivity are measured with constant load resistance (R_L = 1 MΩ) and calculated for matched resistance 						

Typical spectral response per pixel

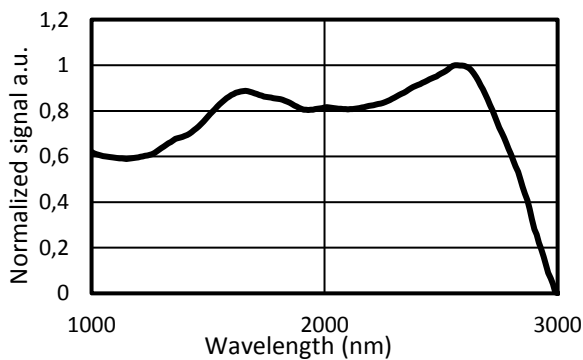

Typical frequency response per pixel

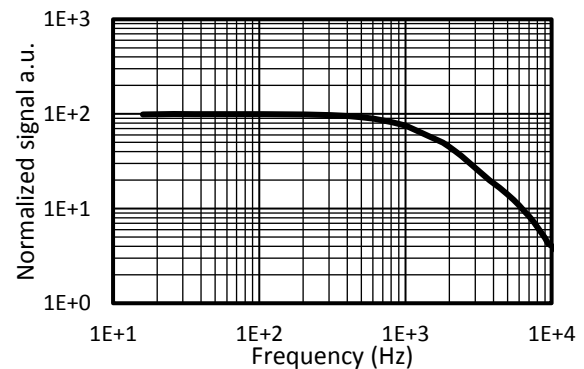

Pin connections

1	TEC +	TEC -	28
2	DET+	TOP_Therm 1	27
3	NC	TOP_Therm 2	26
4	CFG-RST	NC	25
5	SERIAL-CLK	SDATA	24
6	CDG-Load	Read-CLK	23
7	FRAME-START	DAC-Load	22
8	RST-N-BIAS	NC	21
9	DAC_VH	NC	20
10	Mux-Out	Int-CLK	19
11	DAC-VL	TEC-Therm2	18
12	Global-Skim	TEC-Therm1	17
13	VSS	VSS	16
14	NC	VDD	15

Other functionality

- Integration time range: 4.025 μ s – 210 ms (digitally selectable in 3.2 μ s steps)
- Frame rate: sample rates up to 1.000 frames per second
Maximum frame rate achieved at the minimum integration time
- Operating modes:
 - Integrate While Read (IWR)
 - Integrate Then Read (ITR)

Storage

- Storage temperature: -30°C to 70°C
- Exposure to UV light results in permanent damage
- Prolonged exposure to visible light results in low dark resistance

Options

- Filter
- Variable pixel geometry
- Variable number of pixels
- Other packaging options

Regulatory

For the use of Hertzstück™ PbS and PbSe infrared photodetectors in medical devices, monitoring and control instruments and consumer applications RoHS exemptions apply.

For automotive applications Hertzstück™ PbS and PbSe infrared photodetectors fall under ELV exemption.